




ARENA LED 10176



ARENA 10184

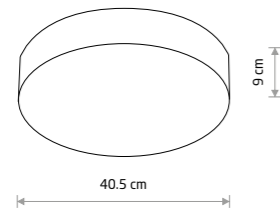



### ARENA

painting steel, plastic PMMA

10184 10178

10182 10175

3x E14, max 10W only LED

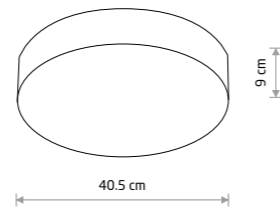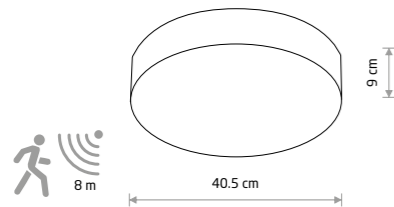

### ARENA SENSOR

painting steel, plastic PMMA

10186 10181 10177

3x E14, max 10W only LED

### ARENA LED


painting steel, plastic PMMA

10185 10180

10183 10176



ARENA LED 10176

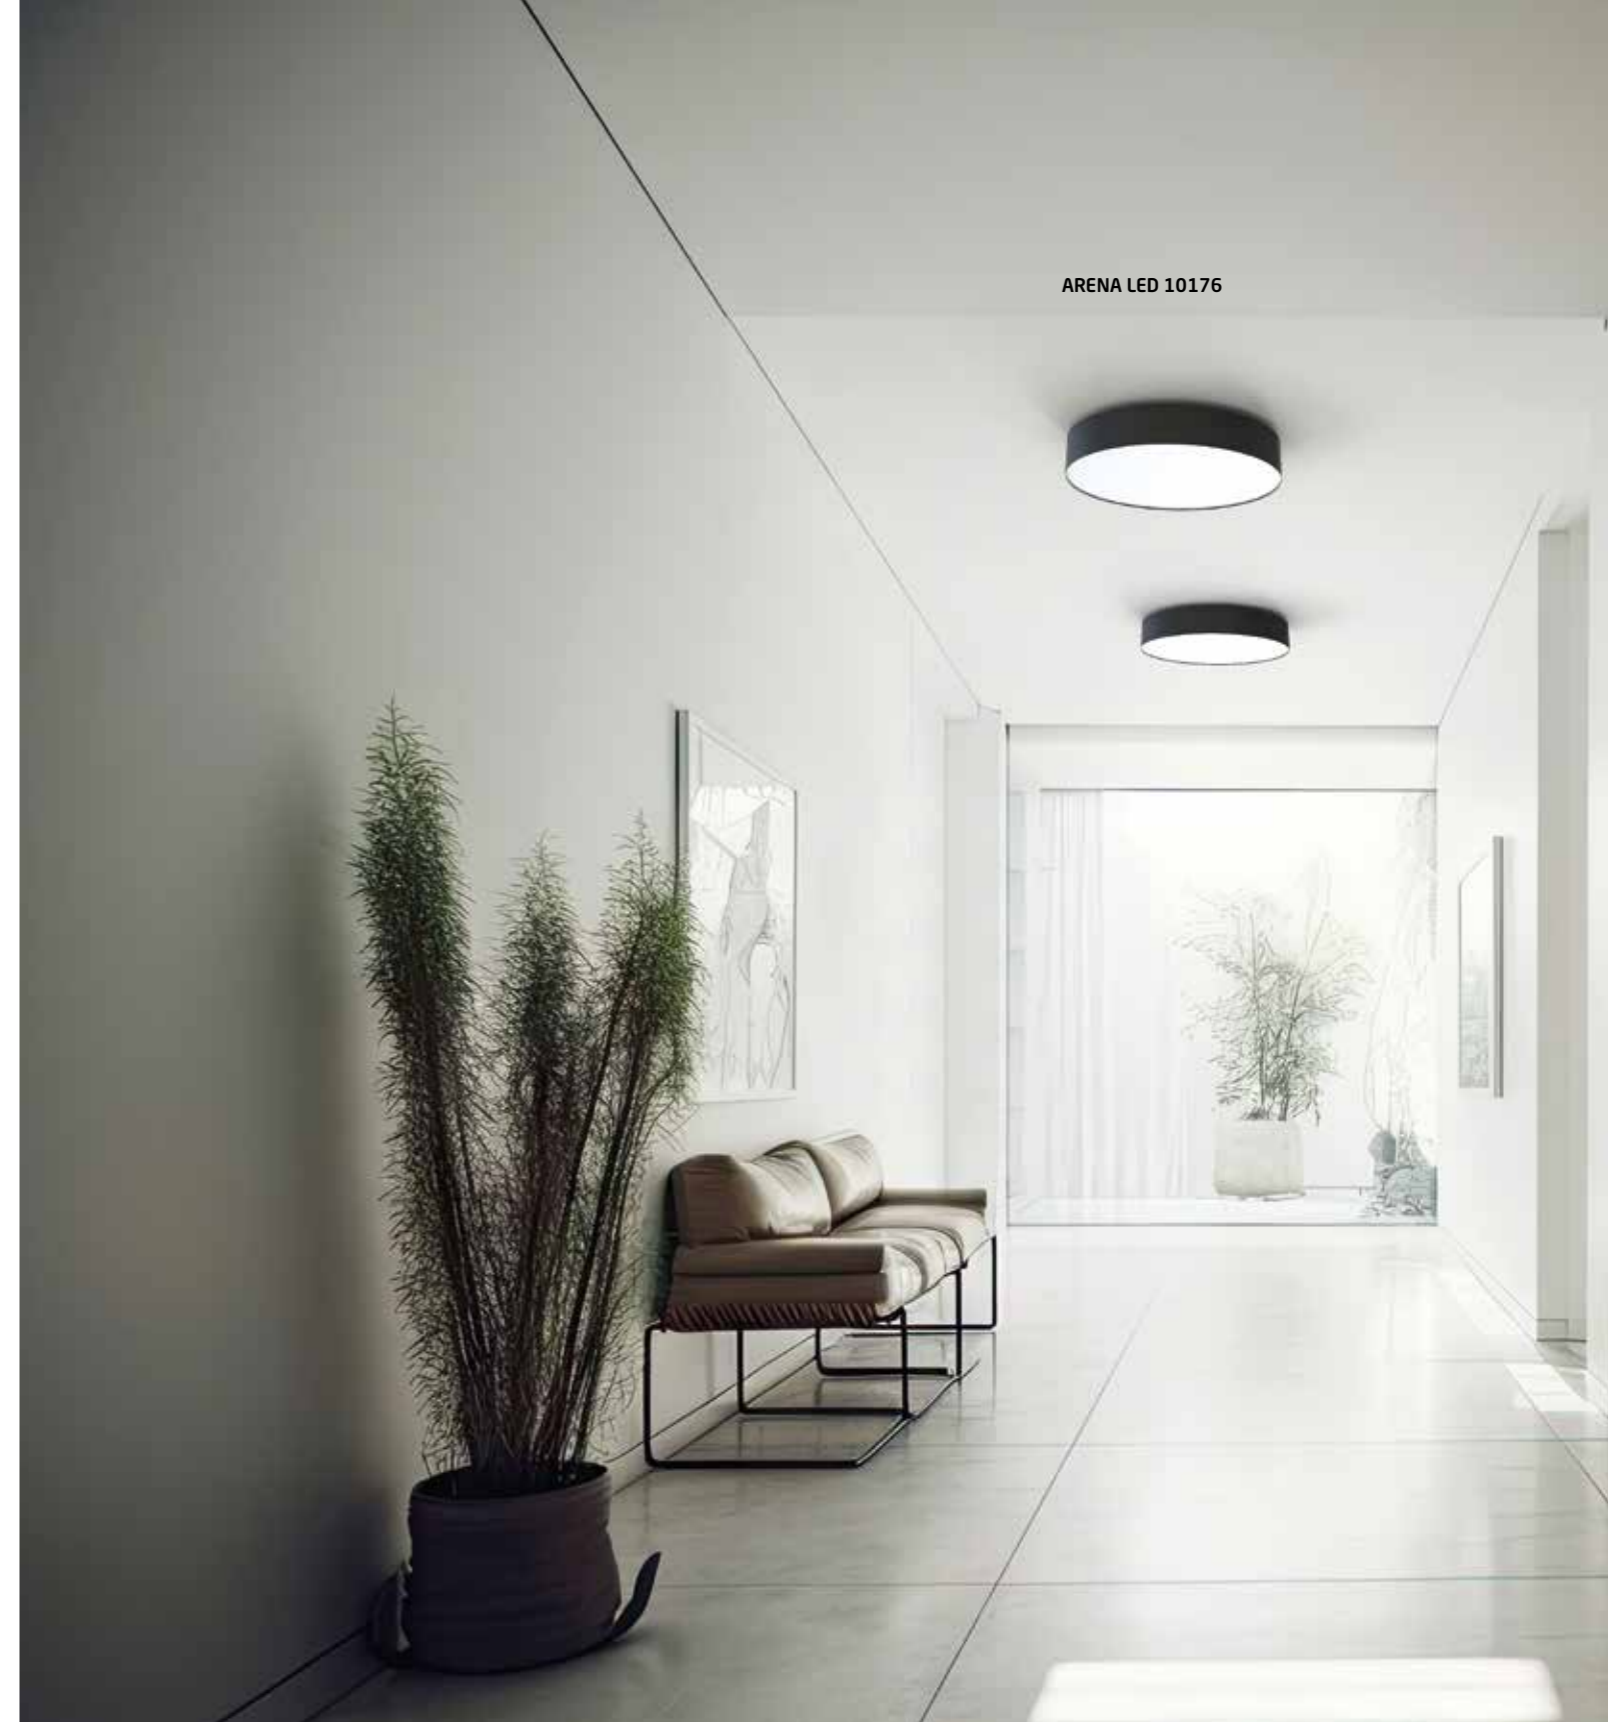

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10185	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10180	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10183	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10176	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h